



L.P. GAS CYLINDER INSTALLATION INSTRUCTIONS


MITSUBISHI LANCER CJ SERIES SEDAN (2007)

This Automotive LP Gas cylinder must be installed in the vehicle in strict accordance with the latest requirements of AS/NZS1425. Any modifications to the cylinder will render the warranty null and void.

General Cylinder Specifications:

DIAMETER : 330mm	LENGTH : 840mm
WATER CAPACITY: 65L	L.P GAS CAPACITY : 52L
VALVE ORIENTATION : 30 degrees	

Installation:

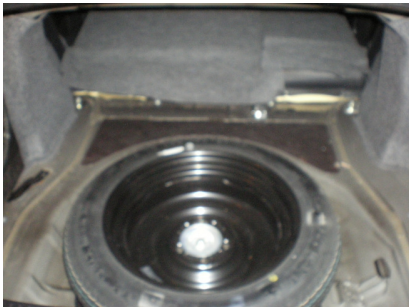

1. This cylinder is designed to be mounted in the luggage compartment, below the parcel shelf. Remove the floor mat, spare wheel and foam inserts.



2. Place the cylinder into position ensuring it is not touching the vehicle at any point. Mark the rear mounting locations.



3. With the rear seats down, mark the rear Mounting points on the car which are the Holes located furthest from the tank. Drill the marked holes 11mm in Diameter.



4. Bolt the tank into position using the bolt pack supplied. Trim the carpet & foam inserts as necessary.